

FRUCTOMAT | *fitness*

FRUCT  **MAT**

BY ASCO DRINK MACHINES



ZUKUNFTSSICHER & RESSOURCENSCHONEND



Our family-run company carries out 100% of its research, development and production in Austria. Products from ASCO DRINK MACHINES rank first among concentrate drink machines in Europe.



A FUTURE-PROOF INVESTMENT

■ **High flexibility and high-quality products** FRUCTOMAT offers top-quality processing, durability and flexibility at all levels. Many customers around the world appreciate and trust our products and services. In the field of beverage dispensers, we provide state-of-the-art products of premium quality with modern technology.

Those years of experience equip us with the necessary experience, know-how and flexibility to provide you with the best and most suitable solutions!




INTELLIGENT DESIGN - UNLIMITED POSSIBILITIES



simple and fast

THE INNOVATIVE FRUCTOMAT SYSTEM

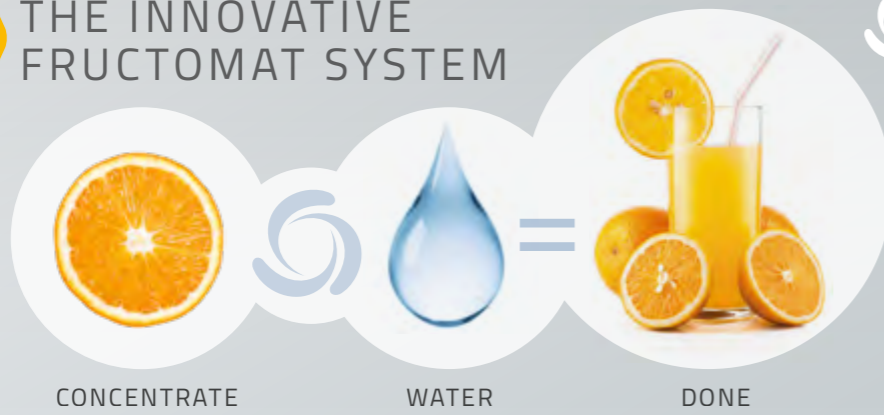

WHY FRUCTOMAT FOR FITNESS?

- > Patented MidMix III® technology - Fully automatic cleaning after EVERY drink
- > Electronically programmable mixing of concentrates up to 1+79
- > Custom design (optional)
- > Drain with canister and FULL notification
- > „Add water or flavour” function
- > CO2 optional
- > Bag-in-Box and tank connection possible
- > Fully electronic control for dosage and output quantities
- > Push and hold or fixed amount quantity

Compatible with your current system

- > RFID chip-enable (optional)
- > Payment system (optional)
- > Potential free connection (optional)



The Advantages at a glance



Save resources

Save on Warehousing and Transport

Save energy


Reduce CO2 emissions

JUICI ID L 4-6



- > 4/6 drinks + chilled water (CO2 –optional)
- > Bag-in-box concentrates are stored in the base cabinet or directly behind the dispensing unit (bags up to 10l possible)
- > Adjustable exit height from 150 - 290 mm or FIX „S” = 150 mm and FIX „L” = 290 mm with cup/glass shelf (adjustable)
- > Multilingual touch control panel 10,1” with WIFI (or 4G connection – OPTIONAL)
- > LCD screen for brand design, advertising and customer information - design (optionally) customizable
- > Front made of compact boards extremely scratch-resistant and easily replaceable - highly flexible adaptation to interior design of your location

Standard designs for JUICI/JDM ID:

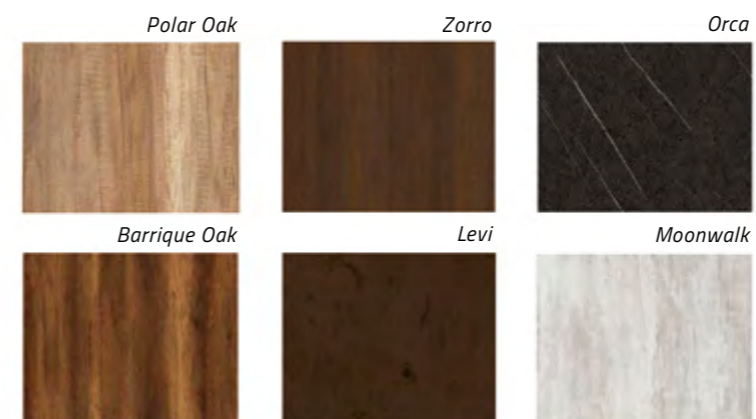



ELEGANT & FLEXIBLE



JDM
ID L 4-5

- > 4 or 5 drinks + chilled water (CO₂ –optional)
- > Bag-in-Box concentrates are stored in the base cabinet or directly behind the dispensing unit (bags up to 10l possible)
- > LCD info display
- > Adjustable exit height from 150 - 290 mm or FIX „S“ = 150 mm and FIX „L“ = 290 mm with cup/glass shelf (adjustable)
- > Anti-vandalism stainless steel buttons
- > Front made of compact boards extremely scratch-resistant and easily replaceable - highly flexible adaptation to interior design of your location



JUICI
CT-L 4-6

- > 4 or 6 drinks + chilled water (CO₂ –optional)
- > 5 or 10 litres Bag-in-Box in base cabinet or other furniture
- > Multilingual touch control panel 10,1" with WIFI (or 4G connection – OPTIONAL)
- > LED illuminated product dispense area
- > LCD screen for brand design, advertising and customer information - option for customized design

Individual
design?
No problem!



F1



F2



F3



F4



FR1



FR2



FR3



MINIMUM SPACE – MAXIMUM PERFORMANCE



**JDM
CTL 4-6**

- > 4 or 6 drinks & chilled water (CO₂ – optional)
- > 5 or 10 litres Bag-in-Box in base cabinet or other furniture
- > LCD info display
- > Anti-vandalism stainless steel buttons
- > LED illuminated product dispense area glass/cup
- > Glass/cup height up to 300 mm
- > ESI (easy slide-in labels)

JUICI/JDM CT
with standard, fitness or individual design!



**JDM
SLIM 4**



- > 4 drinks & chilled water (CO₂ – optional)
- > Dimensions (wxhxd): 260x540x420 mm
- > Bag-in-Box concentrates are stored under/behind the machine -> needs less space on the counter and bigger bags possible
- > 1 central drink exit with LED lighting
- > Anti-vandalism stainless steel buttons

**JDM
SLIM 2 BIB**



- > 2 drinks + chilled water
- > Bag-in-Box concentrates are stored directly in the top segment of the machine (space for two 3 or 5l Bag-in-Box)
- > 1 central drink exit with LED lighting
- > Very small dimensions
- > Anti-vandalism stainless steel buttons





INSTALLATION EXAMPLES



JUICI ID L with edition FIX L

JUICI ID with edition FIX L up to 290 mm with cup/glass shelf (adjustable)



JUICI L 4/6 with card approval



JUICI ID L with adjustable exit height from 150 - 290 mm





BASE CABINETS & ACCESSORIES AND TECHNICAL DATA



Base cabinet with stainless steel surface on top



Base Cabinet - same design with JUICI/JDM ID



3 L Tanks for Concentrates (optional)



DATA	JUICI ID 4-6 L STILL / CO ₂
Width	540 mm
Height	640 mm
Depth	500 mm
Adjustable exit height	150-290 mm
Weight	52 / 56 kg
Pre-selections	OPTIONAL
Product selection (including water)	flexible (Touchscreen)
Automatic caraffe preselection (extra)	✓
Flavours	4 / 6
Mixing ratio for concentrates	1+4 ... 1+49
Concentrates in machine	2 x 10 l or 4 x 5 l
Quantity of selected drink	fix 150-500 ml / PULS
Cooling capacity	28 l/h
Dispensing temperature	5°C - ambient
Water pressure in bar	min 1,5 - max 6
Voltage	230 V/ 50-60 Hz
Power max.	270 / 350 W
with CO ₂ -carbonator	- / ✓
FSS ¹	✓
Flowmeter (water)	✓
Advertising videos and pictures	✓
WiFi Connection transfer system	✓
Ethernet connection	✓
4 G modem for data transfer	OPTIONAL
Dispensing area LED light	✓
Coin validator/cashless	✓
Bookkeeping	✓
Payment systems MDB	OPTIONAL
Monitoring sanitation and cleaning intervals	✓
Syrup Injection Valve (SIV ²)	✓
Concentrate-empty message	OPTIONAL
Water gallon + pumpset	OPTIONAL



DATA	JDM ID 4-5 L STILL / CO ₂
Width	540 mm
Height	640 mm
Depth	500 mm
Adjustable exit height	150-290 mm
Weight	52 / 56 kg
Preselections	OPTIONAL
Product selection	max. 12
Automatic caraffe preselection (extra)	✓
Flavours	4 / 5
Mixing ratio concentrates	1+4 ... 1+49
Concentrates in machine	2 x 10 l or 4 x 5 l
Dosage of product selection	fix 150-500 ml / PULS
Cooling capacity	28 l/h
Dispensing temperature	5°C - ambient
Water pressure in bar	min 1,5 - max 6
Voltage	230 V/ 50-60 Hz
Power max.	270 / 350 W
with CO ₂ -carbonator	- / ✓
FSS ¹	✓
Flowmeter (water)	✓
Dispensing area LED light	✓
Coin validator	✓
External drink release	OPTIONAL
Bookkeeping	✓
Payment systems MDB	OPTIONAL
Monitoring Sanitation / Cleaning Interval	✓
Syrup Injection Valve (SIV ²)	✓
Syrup-empty message	OPTIONAL
Water gallon + pumpset	OPTIONAL

TECHNICAL DATA




DATA	JUICI CT L-4 STILL	JUICI CT L-6 STILL
Art. Nr.	frucB0501Jl	frucB011Jl
Control-/Dispensing unit with tower	L 4	L 6
Width in mm	276 mm	276 mm
Height in mm	525 mm	525 mm
Depth in mm	175 mm	175 mm
Exit height	140 - 310 mm	140 - 310 mm
Weight	6 kg	6 kg
Preselections	1	1
Product selection buttons (incl. water)	5	7
Automatic caraffe preselection (Extra)	✓	✓
ESI product labels ²	✓	✓
Flavours	4	6
Mixing ratio concentrates	1+4 ... 1+49	1+4 ... 1+49
Concentrates in machine	-	-
Dosage of product selection	150-500 ml / PULS	150-500 ml / PULS
Dosage of preselection EXTRA/jug	in planning	in planning
Technics box	-	-
Width in mm	260 mm	260 mm
Height in mm	360 mm	360 mm
Depth in mm	460 mm	460 mm
Weight	max. 23 kg	max. 25 kg
Distance technics box to dispensing unit vertical	max. 1,5 m	max. 1,5 m
Distance technics box to dispensing unit horizontal	max. 5,0 m	max. 5,0 m
Distance concentrate to technics box vertical	max. 1,5 m	max. 1,5 m
Distance concentrate to technics box horizontal	max. 5,0 m	max. 5,0 m
Cooling capacity	28 l/h	28 l/h
Dispensing temperature	5°C - ambient	5°C - ambient
Water pressure in bar	min 1,5 bar/max 6 bar	min 1,5 bar/max 6 bar
Voltage	230 V/ 50-60 Hz	230 V/ 50-60 Hz
Power max.	250 W	250 W
with CO ₂ -carbonator	-	-
FSS ¹	✓	✓
Flowmeter (water)	✓	✓
TFT touch display	✓	✓
Dispensing area LED light	✓	✓
Coin validator/cashless	OPTIONAL	OPTIONAL
Bookkeeping	✓	✓
Payment systems	OPTIONAL	OPTIONAL
Syrup Injection Valve (SIV ³)	✓	✓
Concentrate -empty message	OPTIONAL	OPTIONAL
Water gallon + pumpset	OPTIONAL	OPTIONAL
Control of Disinfection and Sanitation intervals	✓	✓



DATA	JDM CT L-4 STILL	JDM CT L-6 STILL
Art. Nr.	frucB0501	frucB0516
Control-/Dispensing unit with tower	L 4	L 6
Width	210 mm	210 mm
Height	545 mm	545 mm
Depth	200 mm	200 mm
Exit height	140 - 310 mm	140 - 310 mm
Weight	6 kg	6 kg
Preselections	1	1
Product selection buttons (incl. water)	5	7
Automatic carafe preselection (Extra)	✓	✓
ESI product labels ²	✓	✓
Flavours	4	6
Mixing ratio concentrates	1+4 ... 1+49	1+4 ... 1+49
Concentrates in machine	-	-
Dosage of product selection	150-500 ml / PULS	150-500 ml / PULS
Dosage of preselection EXTRA/jug	max 2000 ml	max 2000 ml
Technics box	-	-
Width	260 mm	260 mm
Height	360 mm	360 mm
Depth	460 mm	460 mm
Weight	max. 26 kg	max. 32 kg
Distance technics box to dispensing unit vertical	max. 1,5 m	max. 1,5 m
Distance technics box to dispensing unit horizontal	max. 5,0 m	max. 5,0 m
Distance concentrate to technics box vertical	max. 1,5 m	max. 1,5 m
Distance concentrate to technics box horizontal	max. 5,0 m	max. 5,0 m
Cooling capacity	23 l/h	25 l/h
Dispensing temperature	5°C - ambient	5°C - ambient
Water pressure in bar	min 1,5 bar/max 6 bar	min 1,5 bar/max 6 bar
Voltage	230 V/ 50-60 Hz	230 V/ 50-60 Hz
Power max.	250 W	250 W
with CO ₂ -carbonator	-	-
FSS ¹	✓	✓
Flowmeter (water)	✓	✓
Dispensing area LED light	✓	✓
Coin validator/cashless	OPTIONAL	OPTIONAL
Bookkeeping	✓	✓
Payment systems	parallel / EXE	parallel / EXE
Syrup Injection Valve (SIV ³)	✓	✓
Water gallon + pumpset	OPTIONAL	OPTIONAL
Control of Disinfection and Sanitation intervals	✓	✓



DATA	JDM SLIM 4 STILL
Art. Nr.	frucB0441
Width	260 mm
Height	540 mm
Depth	420 mm
Exit height	160 mm - 280 mm
Weight	30 kg
Preselections	1
Product selection buttons (incl. water)	5
Automatic caraffe preselection (extra)	OPTIONAL
ESI product labels ²	✓
Flavours	4
Mixing ratio concentrates	1+4 ... 1+49
Concentrates in machine	0
Dosage of product selection	150-500 ml / PULS
Cooling capacity	28 l/h
Dispensing temperature	5°C - ambient
Water pressure in bar	min 1,5 - max 6
Voltage	230 V/ 50-60 Hz
Power max.	250 W
with CO ₂ -carbonator	-
FSS ¹	✓
Flowmeter (water)	✓
Dispensing area LED light	✓
Coin validator/cashless	OPTIONAL
Bookkeeping	✓
Monitoring Sanitation / Cleaning Interval	✓
Syrup Injection Valve (SIV ³)	✓
Automatic cup sensor	OPTIONAL
Water gallon + pumpset	OPTIONAL



DATA	JDM SLIM 2 BIB STILL
Art. Nr.	frucB0263
Width	260 mm
Height	490 mm
Depth	420 mm
Exit height	160 mm
Weight	16 kg
Preselections	0
Product selection buttons (incl. water)	3
Automatic caraffe preselection (extra)	-
ESI product labels ²	✓
Flavours	2
Mixing ratio concentrates	1+4 ... 1+49
Concentrates in machine	2x3-5l
Dosage of product selection	150-500 ml / PULS
Cooling capacity	18 l/h (dt 10°C)
Dispensing temperature	5°C - ambient
Water pressure in bar	min 1,5 - max 6
Voltage	230 V/ 50-60 Hz
Power max.	250 W
FSS ¹	✓
Flowmeter (water)	✓
Dispensing area LED light	✓
Coin validator/cashless	✓
Bookkeeping	✓
Payment systems	✓
Monitoring Sanitation / Cleaning Interval	✓
Syrup Injection Valve (SIV ³)	✓
Water gallon + pumpset	OPTIONAL

ALL our models are equipped with the unique and patented mixing system MidMix III.

- 1) FSS = flood security system: avoids water flood problems due to an extra safety valve on water entrance
- 2) ESI = easy slide in for fast and easy change of product labels
- 3) SIV = syrup injection valve for perfect mixing results






FRUCTOMAT the „Drink Machine-Evolution“

ASCO DRINK MACHINES
Produktions- & HandelsgmbH
Steyrer Straße 80
A-4470 Enns

Telefon: +43 (0) 7223 86197-0
Telefax: +43 (0) 7223 86197-9
E-Mail: office@asco.at
Website: www.asco.at
www.fructomat.com

We are at your service:
Monday - Thursday 07:30 - 12:00
and 12:30 - 16:30
Friday 7:30 - 12:00



FRUCT  **MAT**

BY ASCO DRINK MACHINES